




**"H" IS THE HEIGHT OF FENCE. SEE PAY ITEM DESCRIPTION FOR REQ'D HEIGHT FOR PROJECT.

NOTE: ROLL FORMED LINE POST MAY BE DRIVEN TO A MINIMUM OF 3'-0" IN LIEU OF CONCRETE ANCHOR, UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

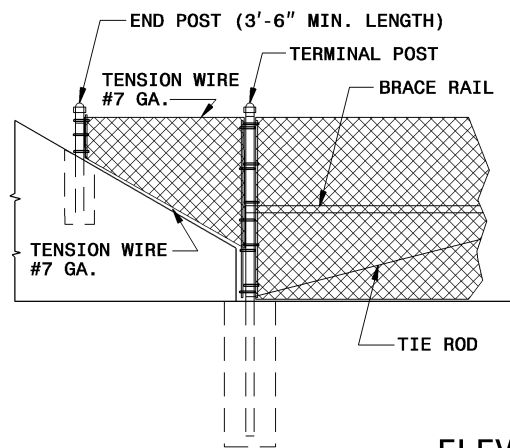


ELEVATION

METHOD OF TYING FENCE TO ENDWALL

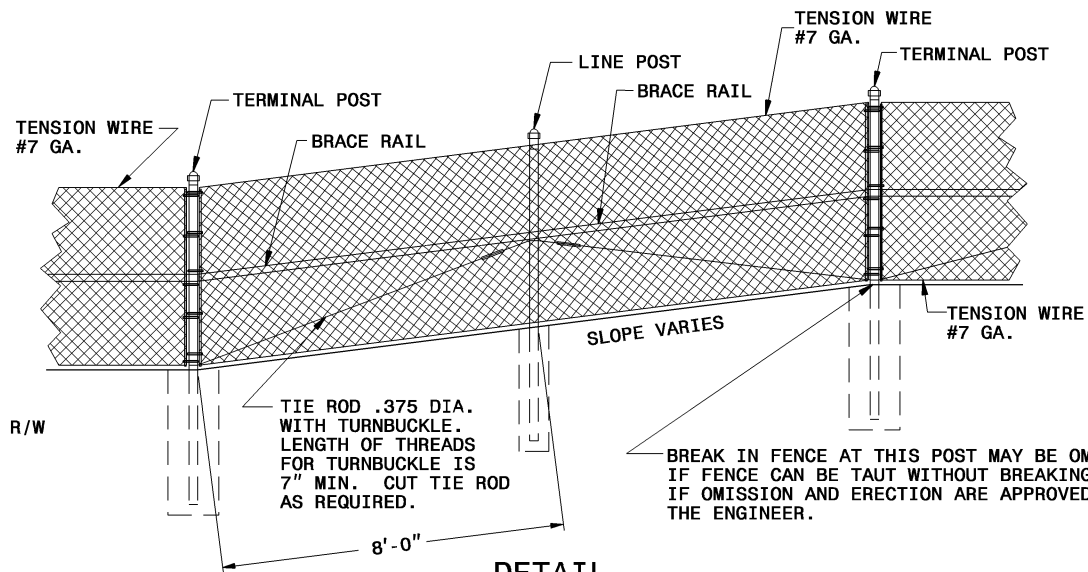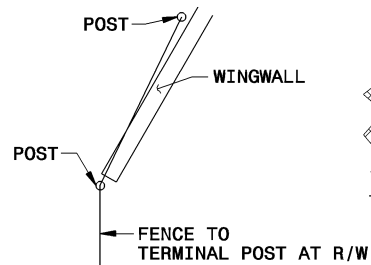


DETAIL

METHOD OF CONSTRUCTING FENCE ON SHARP BREAK IN GRADE

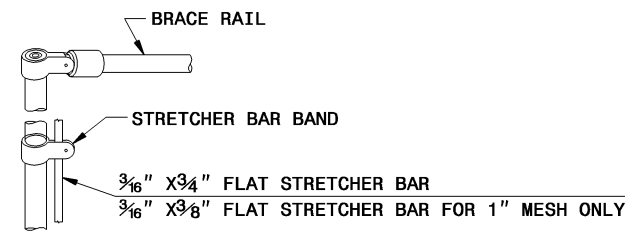

GATE OR TERMINAL POST WITH STRETCHER BAR ATTACHMENT



METHOD OF TYING FABRIC TO "H" POST

NOTES:
CAPS ARE REQUIRED ON PIPE POST. CAPS ARE NOT REQUIRED ON "H" POST OR ROLL FORMED POST. INSTALL FENCE FABRIC ON THE SIDE FARTHEST FROM THE HIGHWAY EXCEPT THAT ON HORIZONTAL CURVES GREATER THAN THREE DEGREES, INSTALL THE FENCE TO PULL AGAINST LINE POST. CONSIDER ALL CHANGES IN DIRECTION OF FENCE LINE OF 30° OR MORE AS CORNERS.